



SERIOUS HEAD PROTECTION

ADJUSTABLE SUNSCREEN M10

HP10/HP10 RALLY
MAG-10/MAG-10 RALLY

⚠️ IMPORTANT.

Read this notice before placing the SUNSCREEN on your helmet!

DIRECTIONS FOR USE


Sunscreen made from polycarbonate. Can be seriously damaged by many common substances. Not warranted shatterproof. No aggressive cleaning products to be used.

⚠️ If this sunscreen has a mirror coating or is tinted, it is recommended for day use only.

SUNSCREEN INSTALLATION

It is important to properly remove and install Sunscreens onto your helmet to guarantee the highest level of vision clarity and overall protection. By following these simple steps, you will be able to assure your sunscreen is in the best possible condition to succeed in any application.

1. Remove left and right side peak/sunscreen pivot screws using BELL RACING hex wrench, or a key (5/16 or 8mm) for the pivot & 3/32 or 2.4m for the SV.
2. Remove left and right side SV brake screws and SV brake washers.

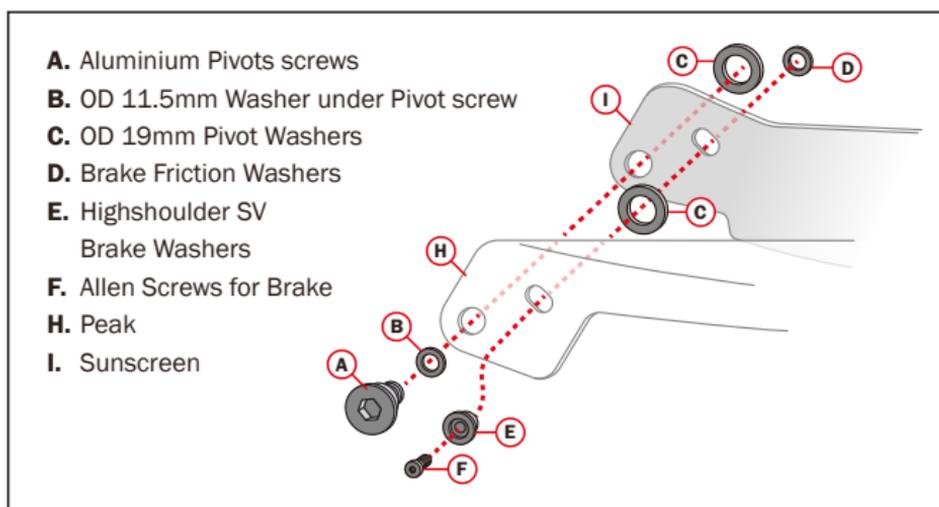

3. Remove the peak and the old sunscreen and if necessary replace the pivot and friction washers. New washers have a self-adhesive side to be applied on the helmet shell.
4. Place the new sunscreen and peak over the well centred friction washers and screw in the pivot screws.

⚠️ DO NOT OVERTIGHTEN. Maximum torque 4.0 N-m

5. The tension for operating the sunscreen is adjusted by fully tightening the brake washer equally on both sides by using the BELL RACING hex wrench (DO NOT overtighten). Once tight, release 1/2 turn to reduce the pressure to allow the sunscreen to open and close. Adjust the tension as needed.

⚠️ DO NOT USE THREAD LOCK

Using thread lock on the screws can damage the threaded inserts in the helmet. Do not use thread lock on aftermarket tear-off post screws as this can cause a chemical reaction with the polycarbonate sunscreen.



CLEANING

CLEANING OF INNER SIDE: Use only Dry Microfiber cloth or shield pouch to clean the inside of the sunscreen.

⚠️ Do not use liquid products, no chemical, ONLY DRY & SOFT microfiber cloth!

CLEANING OF OUTER SIDE: Use window cleaner product or specific product from Bell.

⚠️ Do not use brake cleaner, gasoline, fuel, solvents nor any other aggressive products!