



⚠ IMPORTANT.

TO ENSURE OPTIMAL AUDIO PERFORMANCES, YOUR MICROPHONE MUST BE POSITIONED EXACTLY IN FRONT OF YOUR MOUTH AND CLOSE TO YOUR LIPS (5 to 10mm distance maximum).


Read this notice before placing the MICROPHONE in your helmet!

The HP10 Rally, Mag-10 Rally Carbon and Mag-10 Rally Pro are delivered with a medium size (24mm) microphone spacer.

This kit includes a small (15mm) microphone spacer and a large (33mm) microphone spacer. They allow you to find the optimal position of the microphone right in front of your mouth, at a distance maximum of 5 to 10mm from your lips.

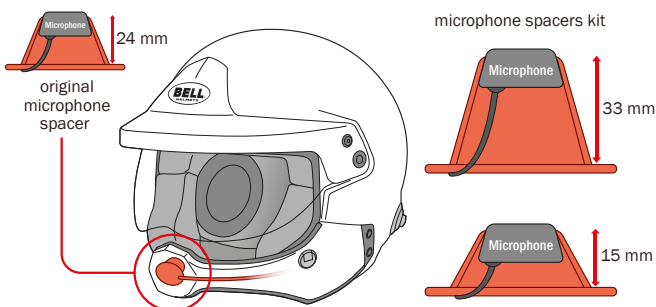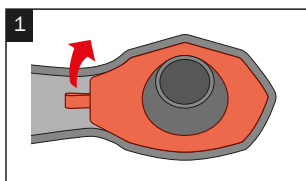

DIRECTIONS TO REPLACE


1. Remove the diamond-shaped piece. Pull the tab and unhook the Velcro.

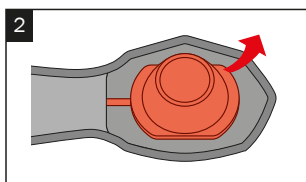


2. Remove the cone microphone group.


⚠ WARNING.
Be careful not to pull excessively to avoid damaging the internal microphone cable!

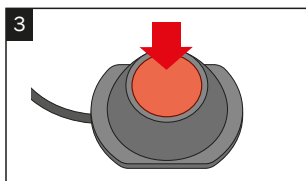


3. Push the microphone FR foam protector to remove the microphone from the separator cone.

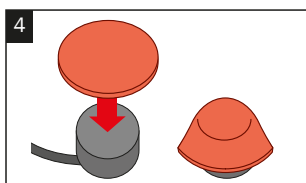


4. Cover the microphone again with the FR microphone foam protector. You can use the same foam or the new one supplied in this kit.

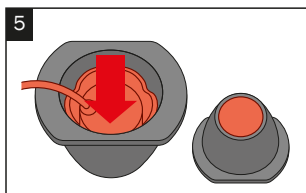

5. Insert the microphone and the FR microphone foam protector in the new microphone spacer of the new selected size. Push in until you reach the same level as the end of the cone without going over it.

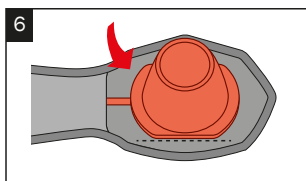

6. Attach the new cone-microphone cluster to the base of Half Chin Bar. The cone must be assembled parallel to the Half chin bar, as in the illustration 6. The fixation is done by Velcro.

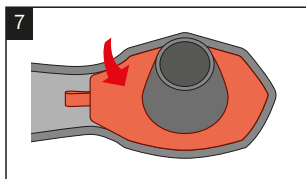

7. Place the diamond-shaped piece covering the base of the spacer cone. The fixation is done by Velcro.